



GIE Inc. *Global Industrial Equipment, Inc.*

THE ANSWER TO CORROSION

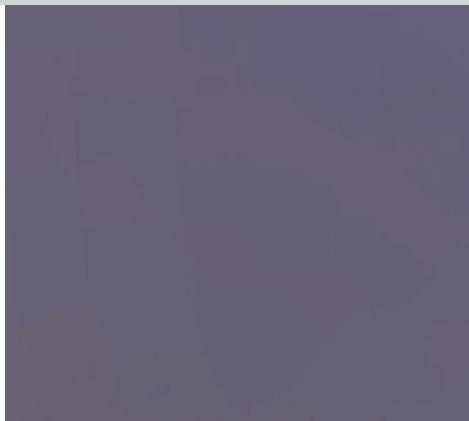


B O D Y
& D I S C
L I N I N G

P F A
P V D F

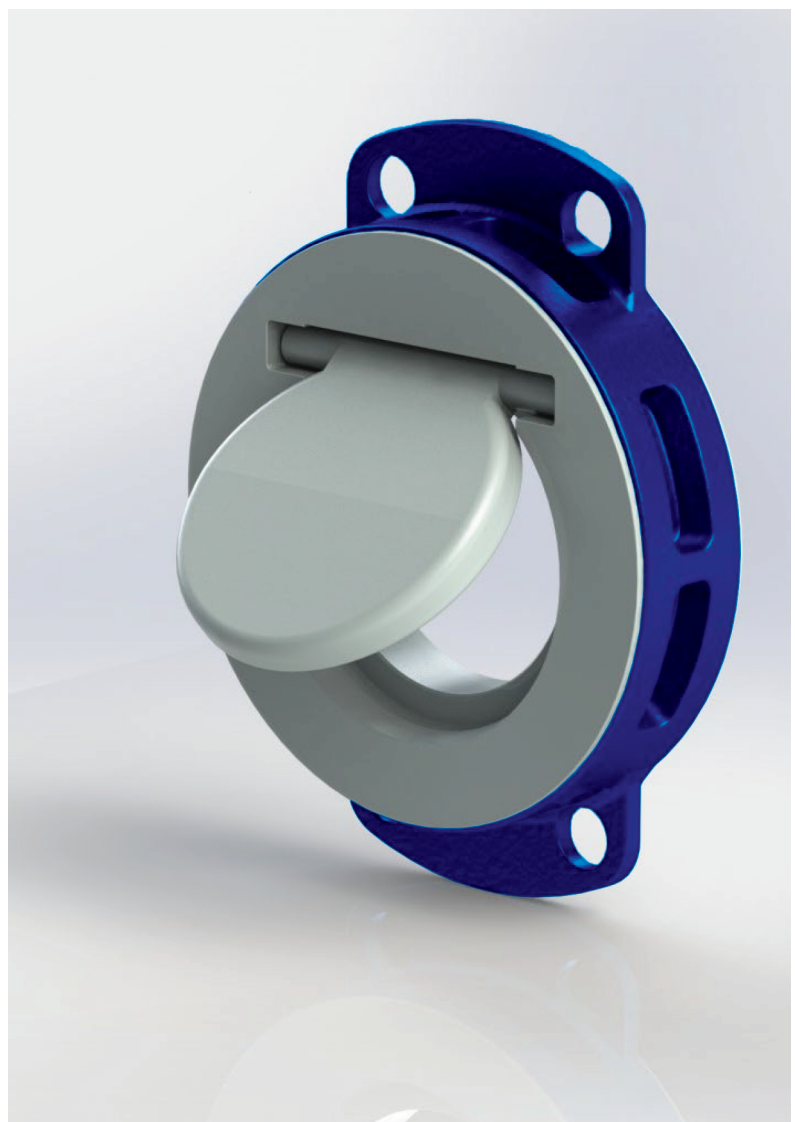


P L A S T I C L I N E D
S W I N G C H E C K V A L V E
W A F E R - T Y P E

PLASTIC LINED SWING CHECK VALVE WAFER-TYPE

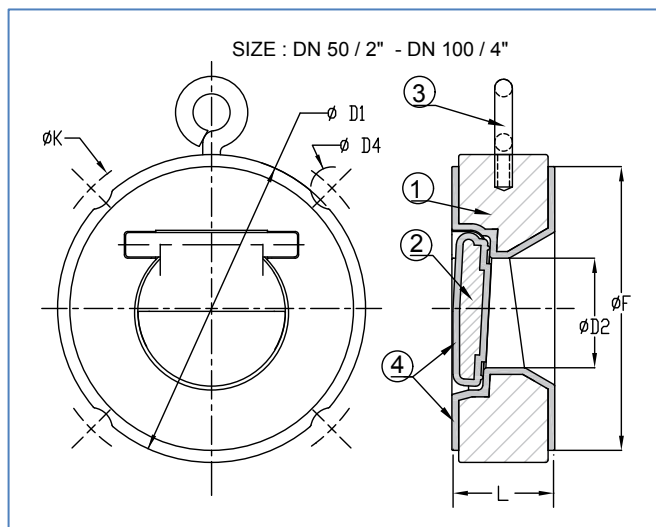

Part	Descr.	Material
1	Body	CAST STEEL A216 WCB
2	Dics	CAST STEEL A216 WCB
3	Eye Bolt	CARBON STEEL
4	Lining	PFA / PVDF

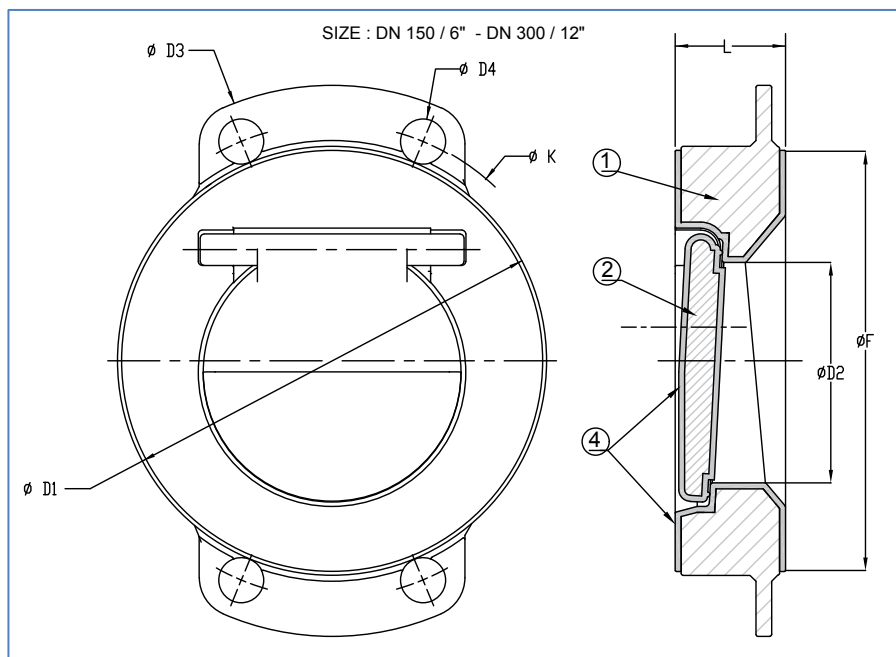

FEATURES

1. Face to Face dimensions as per as per ANSI B16.10 150# Narrow / EN 558-2 Series 20.
2. Suitable for mounting between ANSI B16.5 150# flanges
3. Gravity operated
4. Tilted disc
5. Integrated PFA Lip Seal
6. Testing as per API 598
7. Three coat epoxy external surface finish
8. All dimensions in inch & (mm)

Size	ØD1	ØD2	ØD3	ØD4	ØK	ØF	L	Lin thk (min)
2" (50)	4.33" (110)	1.10" (28)		0.75" (19)	4.75" (120.7)	3.62" (92)	1.69" (43)	0.12" (3)
3" (80)	5.43" (138)	1.93" (49)		0.75" (19)	6.00" (152.4)	5.00" (127)	1.81" (46)	0.12" (3)
4" (100)	7.09" (180)	2.83" (72)		0.75" (19)	7.50" (190.5)	6.18" (157)	2.05" (52)	0.12" (3)
6" (150)	8.58" (218)	4.41" (112)	11.02" (280)	0.91" (23)	9.50" (241.3)	8.50" (216)	2.20" (56)	0.12" (3)
8" (200)	10.83" (275)	6.18" (157)	13.50" (343)	0.91" (23)	11.75" (298.5)	10.63" (270)	2.36" (60)	0.12" (3)
10" (250)	12.99" (330)	7.80" (198)	16.02" (407)	0.98" (25)	14.25" (362)	12.76" (324)	2.68" (68)	0.12" (3)
12" (300)	15.35" (390)	9.69" (246)	19.02" (483)	0.98" (25)	17.00" (431.8)	15.00" (381)	3.07" (78)	0.12" (3)

Global Industrial Equipment, Inc.

NOTES:

ADMIN. OFFICE

2434 Darnell Drive
Spring Valley, Ohio 45370

Toll Free: 888-243-8443
Fax: (937) 862-9501
Email: sales@gieinc.com
Website: www.gieinc.com